

CONNECTIVITY AND ACCESSIBILITY APPROACHES TO NETWORK ROBUSTNESS: THE ALLOCATION OF MOBILITY HUBS

**Caterina Malandri, Roberto Patuelli, Michele Rabasco,
Aura Reggiani, Rebecca Rossetti**

Department of Economics, University of Bologna, Italy





ALMA MATER STUDIORUM
UNIVERSITÀ DI BOLOGNA

MOBILITY HUBS (MH)

Definition

Dedicated and permanent platforms where **public and shared transport** can be integrated by switching between modes

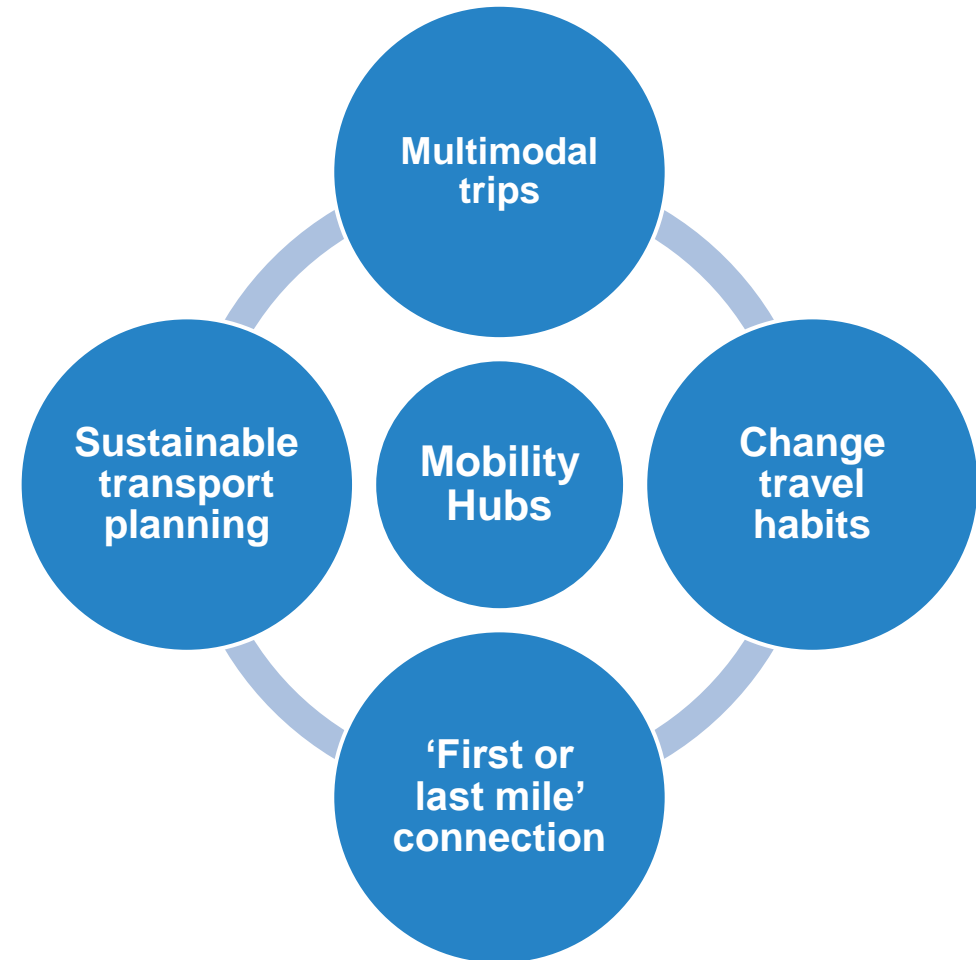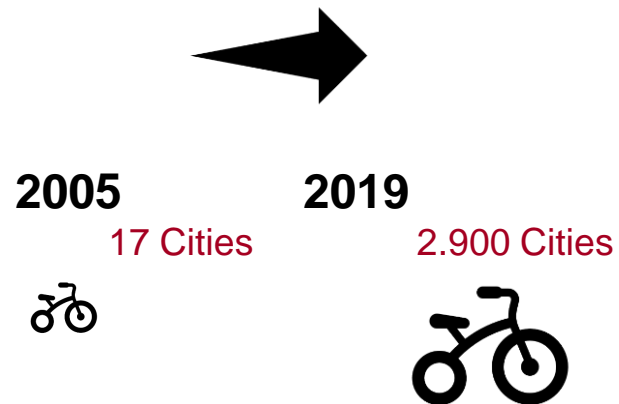


RESEARCH QUESTIONS

Can network robustness and accessibility metrics help with MH location choice?

Network robustness is the ability of networks to resist failures or attacks. MH may contribute to robustness by providing redundancy in networks (Rose, 2009)

Accessibility refers to the relative ease of reaching a particular area (Hansen, 1959)

HOW TO ALLOCATE MOBILITY HUBS?

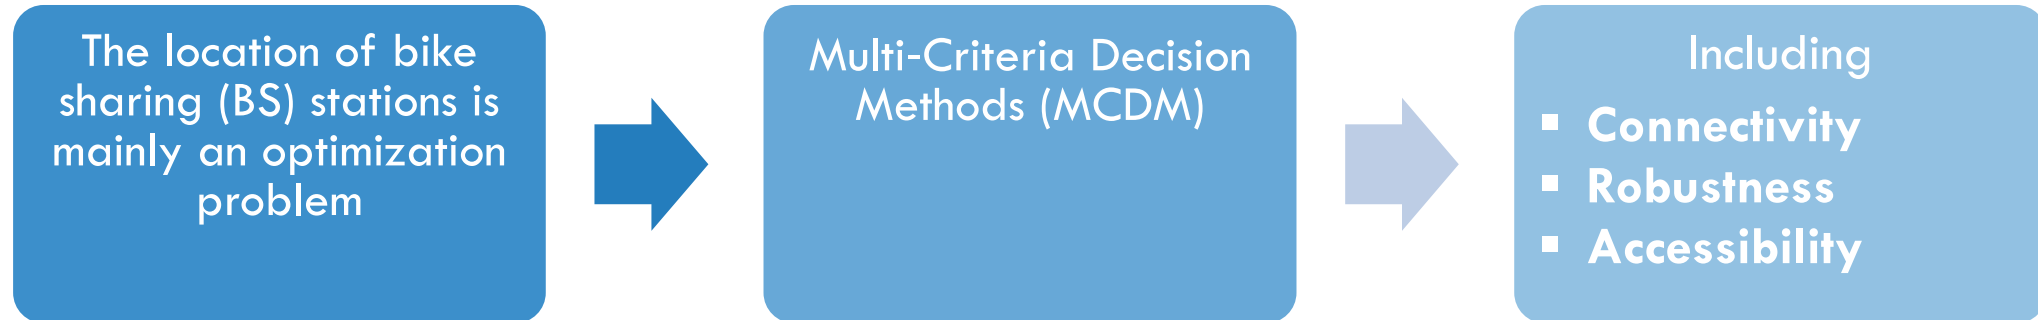

We focus on:

Station-Based Bike-Sharing (SBBS) and
Public Transport Network (PTN) integration

Reasons:

- SBBS is the most widespread and studied sharing mode and the one for which the most data are available
- Its role in **interchanging between public transport modes**

MCDM

Using “easily” accessible data

The most suitable PT stop for mobility hubs: multidimensional analysis

Potential Location / Criteria / Sub-criteria	<u>Connectivity/ Robustness</u> <i>Node centrality measures</i> <i>PTN connectivity loss after the stop removal</i>	<u>Accessibility</u> <i>Area accessibility loss after the stop removal</i>	<u>Sustainability</u> <i>No. of sustainable modes in the stop</i>	Other <i>Demand points/zones</i> <i>Points of interest</i> <i>Population density</i> ...	Score
Stop 1					
Stop 2					
...					
Stop N					

NODE CENTRALITY MEASURES AND NETWORK ROBUSTNESS

Node Centrality

Betweenness

Degree

Efficiency (to be added)

$$E = \frac{1}{N(N-1)} \sum_{i \neq j} \frac{1}{d_{ij}}$$

Unweighted

$$E_p = \frac{1}{N(N-1)} \sum_{i \neq j} \frac{w_{ij}}{d_{ij}}$$

Weighted by
the flow of
“passengers”

Applied to:

1. Aggregated single-mode networks (**SMNs**): metro, tram, and bus network (**PTN**)
2. PTN including travel time (**PTNt**)
3. PTNt weighted by passenger flows (**WPTNt**)
4. Aggregated PTN stops and bike-sharing stations including travel time by bike (**PTNBt**)
5. PTNBt weighted by passenger flows (**WPTNBt**)

AREA ACCESSIBILITY MEASURES

Doubly constrained spatial interaction model (SIM)

The flow between the origin (O_i) and destination (D_j) is a function of the **potential** at each origin, the **attractiveness** of each destination, and the **cost** (d_{ij}) of overcoming the separation between them:

$$T_{ij} = A_i B_j O_i D_j \exp(\beta d_{ij})$$
$$A_i = \left(\sum_j B_j D_j \exp(\beta d_{ij}) \right)^{-1}$$
$$B_j = \left(\sum_i A_i O_i \exp(\beta d_{ij}) \right)^{-1}$$

The parameter β (impedance parameter) may be calibrated (estimated) and used to calculate the indicator of Accessibility for each area




$$ACC_i = \sum_j D_j f(\beta, d_{ij})$$

From 2. PTN including travel time




FROM SMNS TO PTN

1 SMNs_Stop Aggregation
(by stop name)

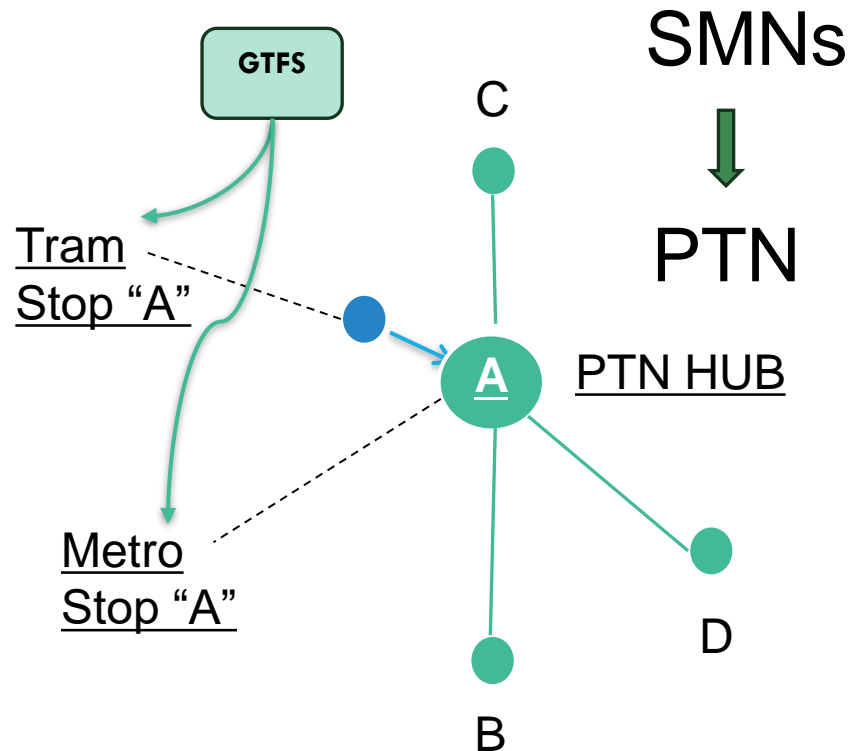


2 Adding Travel Time
Graph Expansion

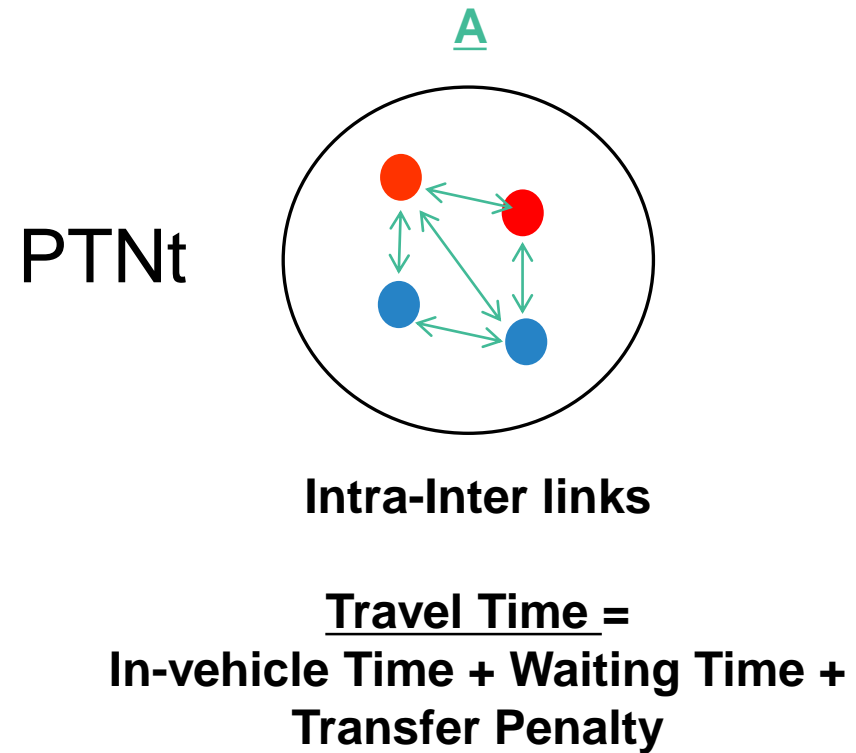

ADDING PASSENGERS FLOWS

3

- Demand per O/D areas \rightarrow demand per i/j stop
- Static assignment (SA; deterministic)

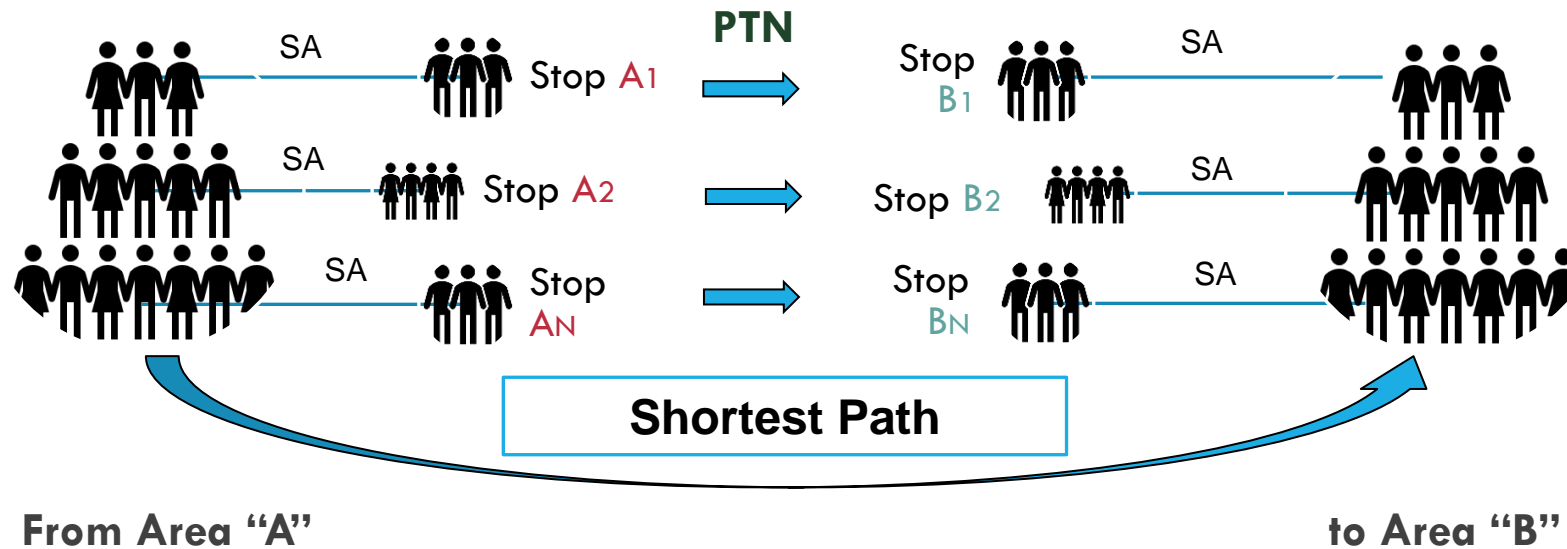


ADDING THE BIKE-SHARING MODE

4


Bike Station – PTN Aggregation

Bike Network as a new transport mode to use after a disruption affecting the PTN

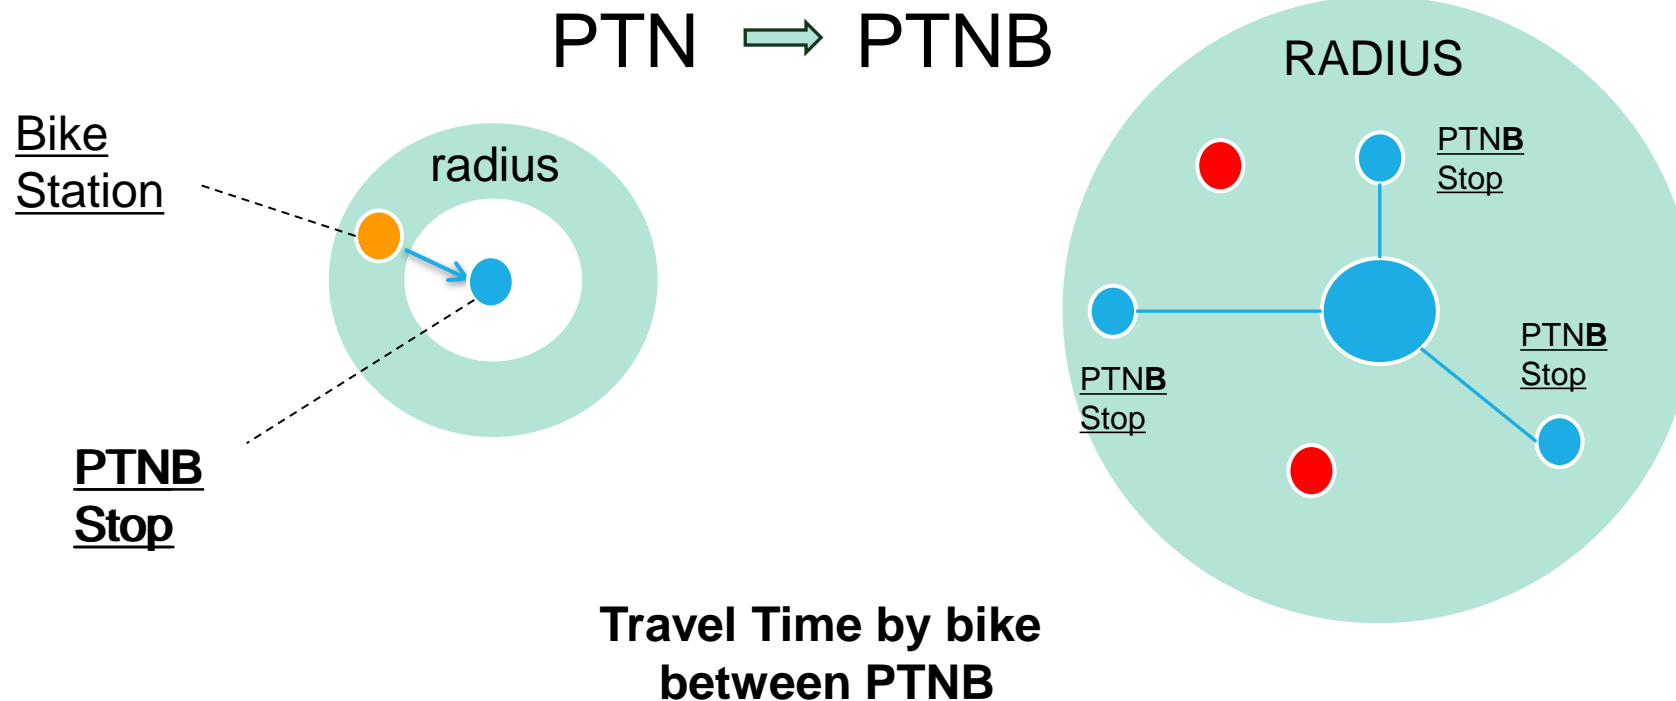

CASE STUDY: VIENNA



Vienna benefits from the services of a unique PT provider, namely Wiener Linien GmbH (WL). Vienna's PTN consists of **5 metro**, **29 tram**, and **127 bus routes**. WienMobil Rad is the public bicycle rental service fully operational from fall 2022 with **233** fixed bike-stations and 3,000 bicycles

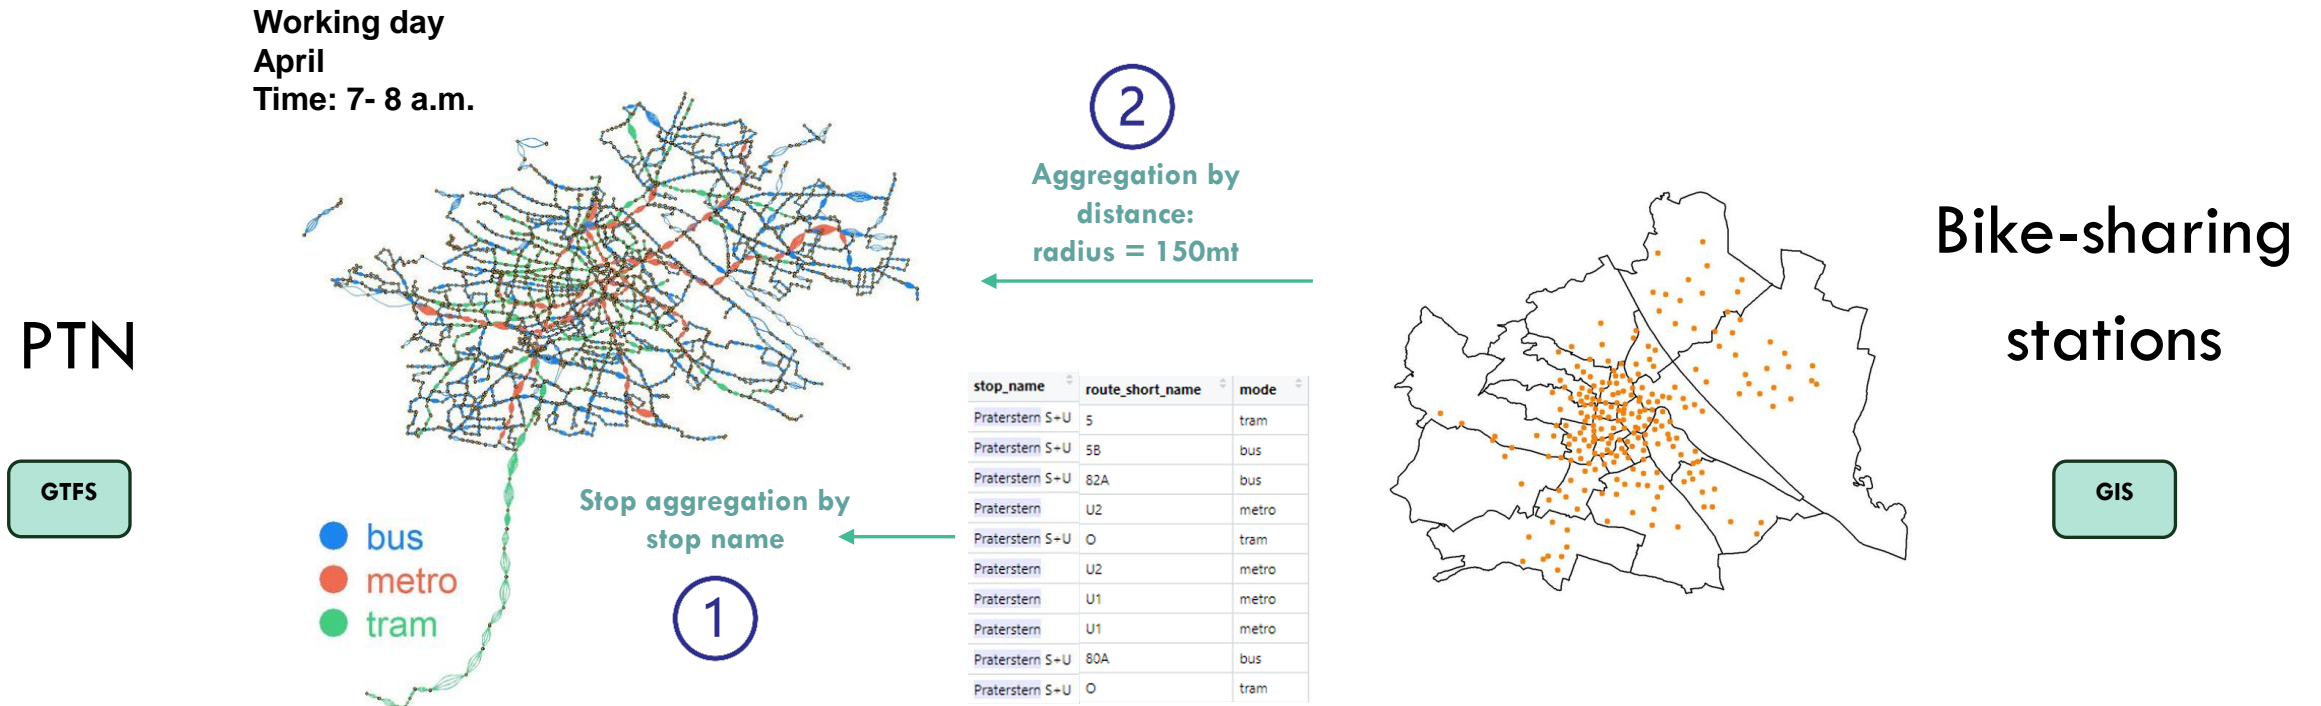

Data source: City of Vienna - <https://data.wien.gv.at>

ORIGIN-DESTINATION FLOWS


The composition of flows is very heterogeneous with some peaks (blue lines) such as between **Favoriten**, a highly populated urban area with many residential buildings, and the central district **Innere Stadt**

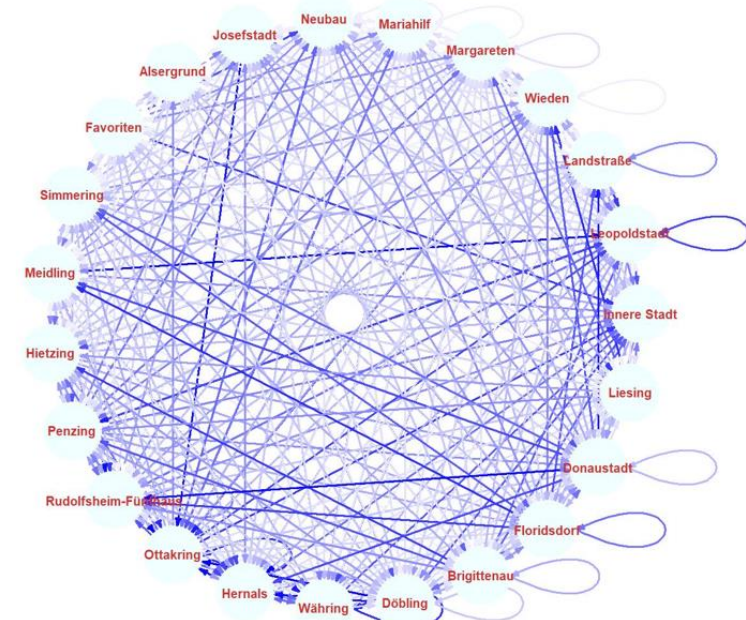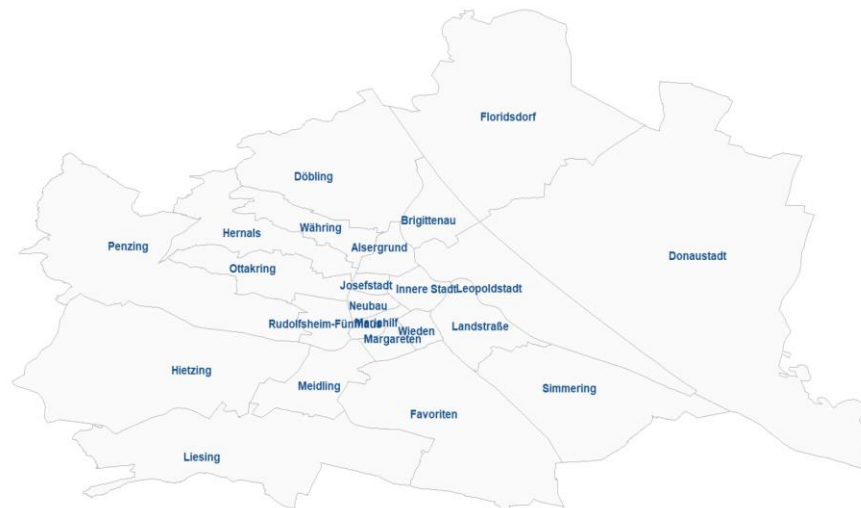

Commuting destination
Data from statistik.at

FLOWS ASSIGNMENT



Non-adaptive assignment: Metro (M), metro+tram (M+T), metro+tram+bus (PTN) considering waiting time ($1/\text{frequency}$) and a 10-min penalty for line changes (also in route choice)

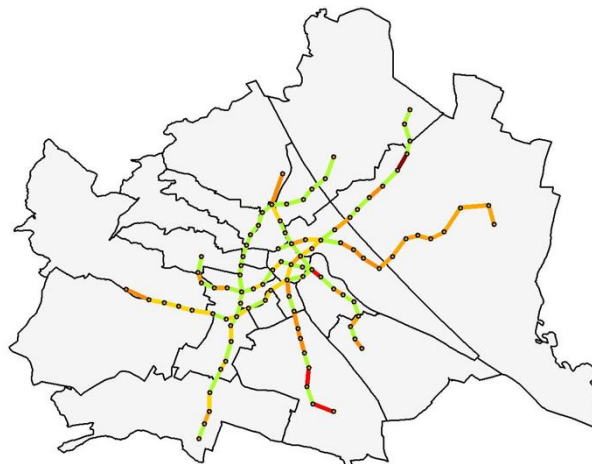

M

Baseline - Scenario

PTN

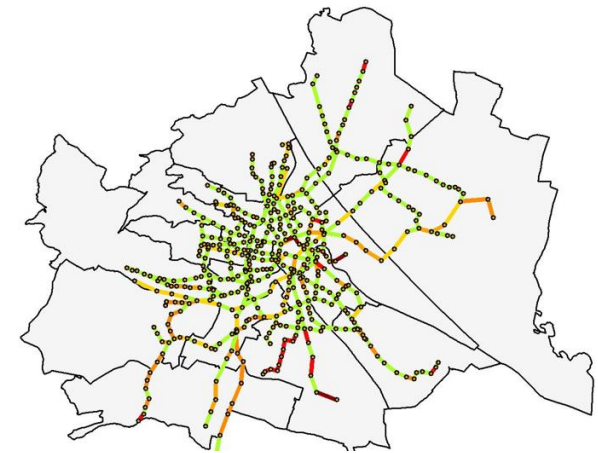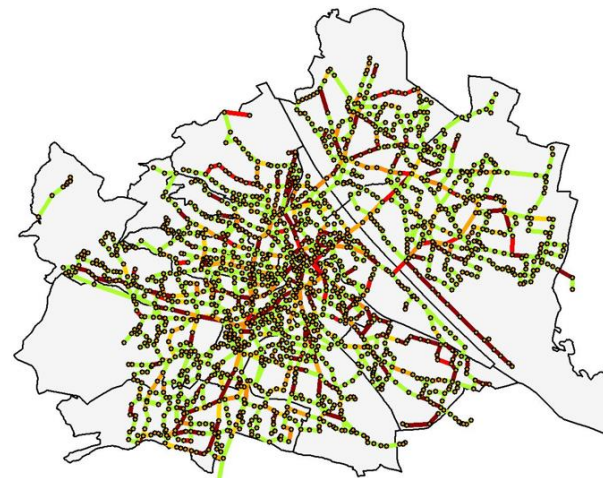


M + T

High


Low

ANALYSES: NODE CENTRALITY

Betweenness
(Aggregated Stops)

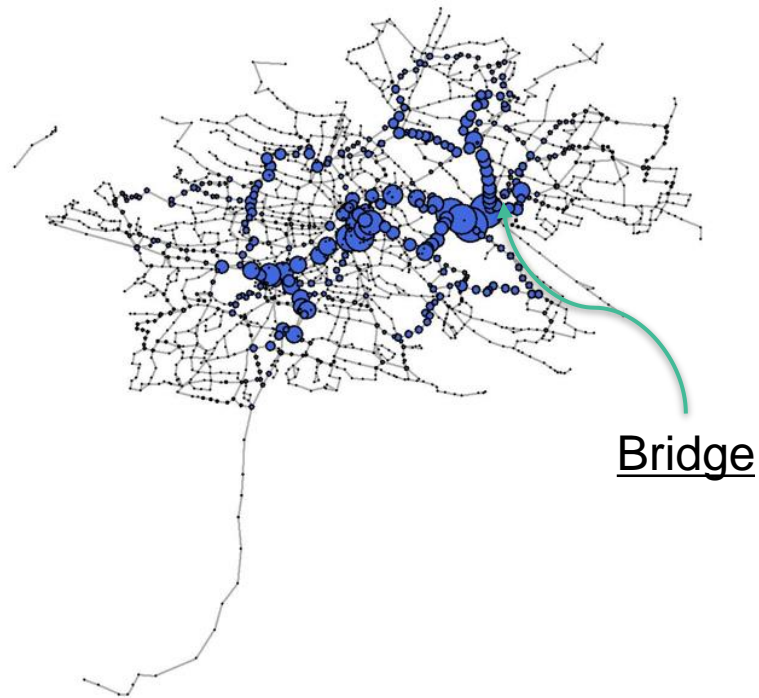


Degree
(Aggregated Stops)

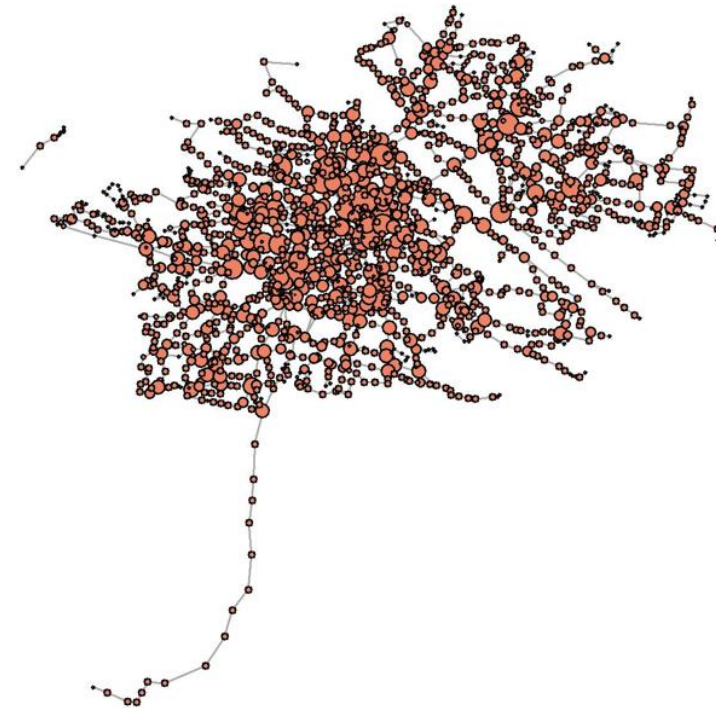


ADDING THE BIKE-SHARE SERVICE


From PTN to PTNB

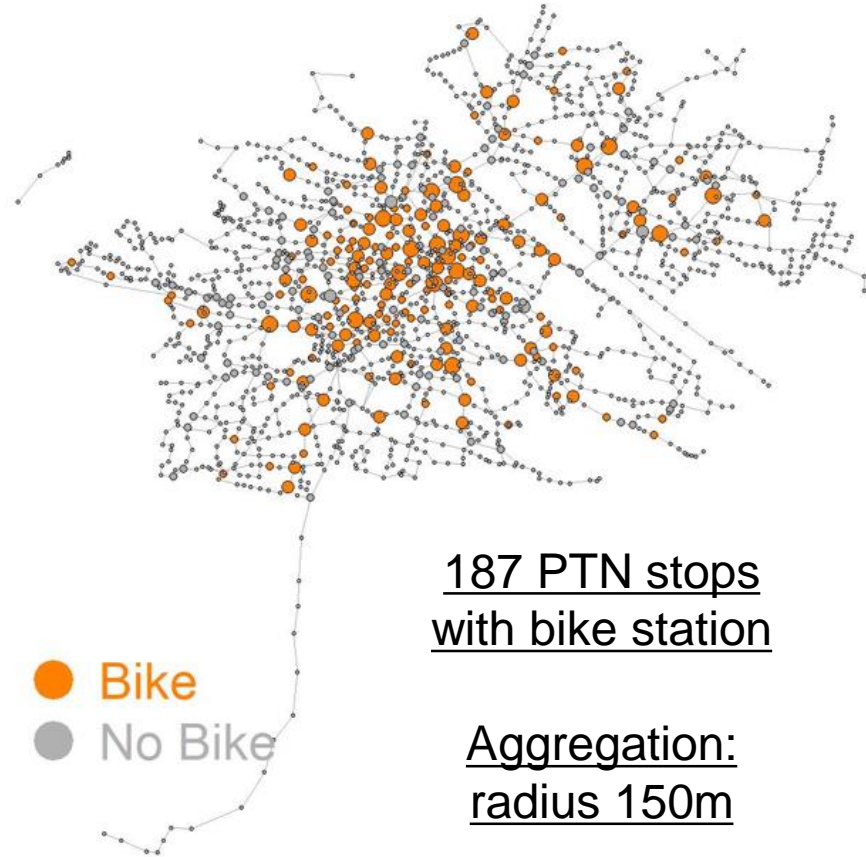

Percentage of PTN by number of modes

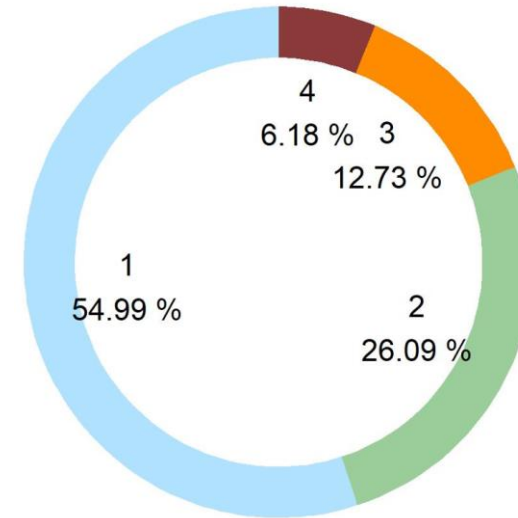

MCDM – HOW TO CHOOSE ALTERNATIVES

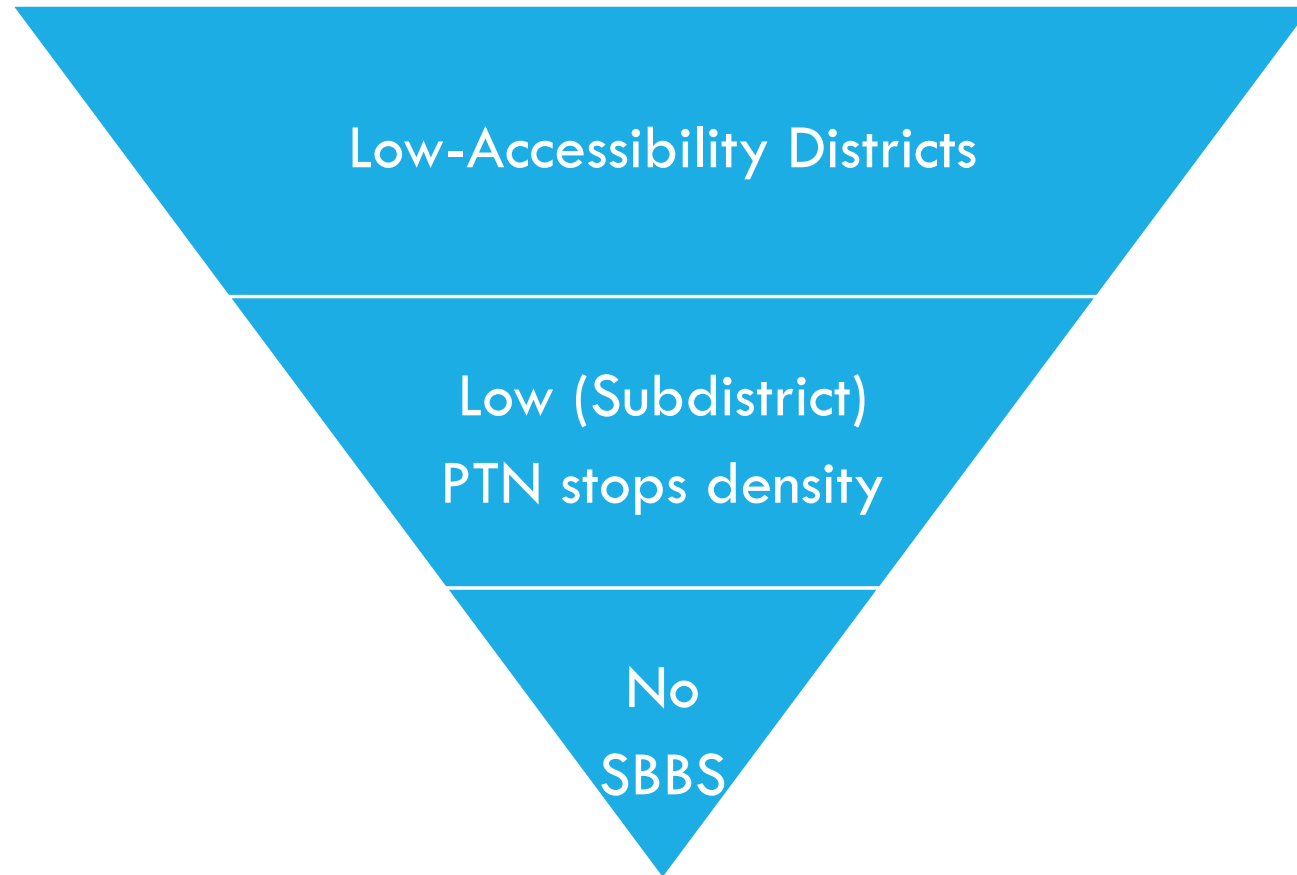

ALTERNATIVES AND CRITERIA

C1. Urban Life Dimension (Red dots)

- C1.1. Proximity to green areas (+)
- C1.2. Proximity sport centers (+)
- C1.3. Proximity to tourism/recreation areas (+)
- C1.4. Proximity to schools (+)

GIS data

From <https://www.opens-treetmap.org/>

C2. Demographics

- C2.1. Population Density (+)
- C2.2. 15-64 years ratio (+)

Census 2008 data census

From <https://www.data.gv.at>


C3. Robustness

- C3.1. Degree centrality (+)
- C3.2. Betweenness centrality (+)
- C3.3. Loss of efficiency (+) (TO BE ADDED)

GTFS data

From City of Vienna - <https://data.wien.gv.at>

Low PTN density (subdistrict)

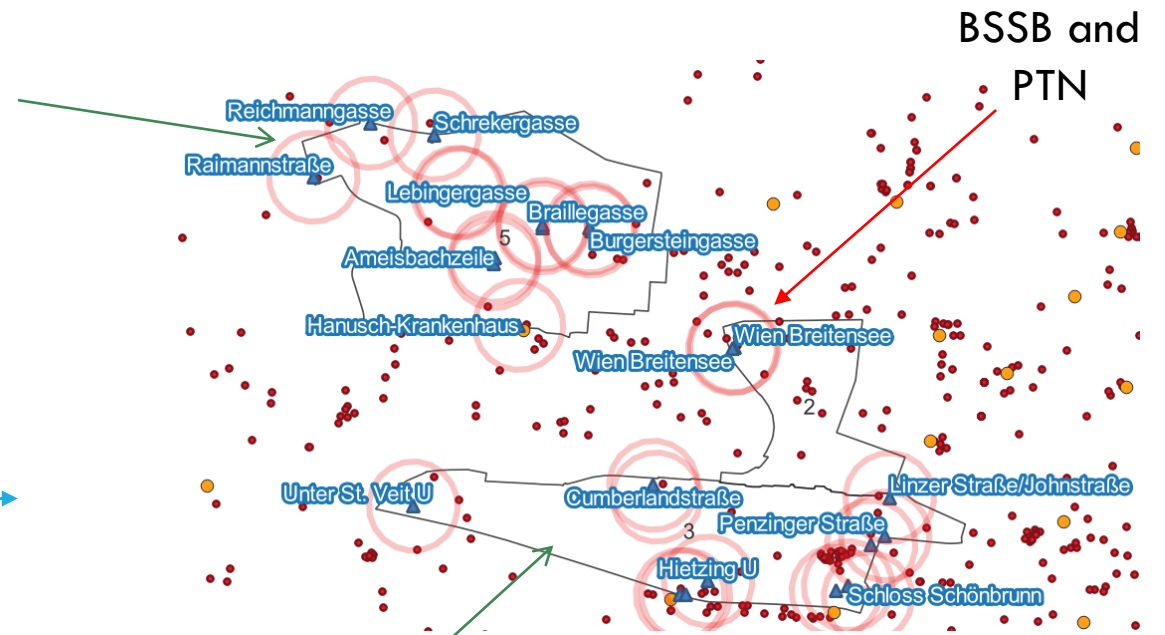


Low PTN density (subdistrict)



MCDM – WEIGHTS



The weights are **derived** from the answers of an international panel of experts, academics and professional working in the domain of transportation and shared mobility services (SmartHubs project)




Since the original analysis was about the sustainability impacts of mobility hubs, the weights are **adapted** to match the purposes of our work

A FIRST IMPACT MATRIX

Red alternatives are “real”, in order to test the adequacy of actual bike hubs

stop_id	stop_name	Amenities	Betweenness	Degree	Pop_dens	Ratio_14_65
at:49:166:0:3	Wien Breitensee	4	77	2	0,332356706	0,737878718
at:49:166:0:7	Wien Breitensee	4	77	2	0,332356706	0,737878718
at:49:1176:0:3	Schloss Schönbrunn	4	496451	2	0,142943812	0,682509308
at:49:1158:0:5	Linzer Straße/Johnstraße	3	446991	2	0,142943812	0,682509308
at:49:1561:0:2	Cumberlandstraße	4	130	2	0,142943812	0,682509308
at:49:520:0:19	Hietzing U	9	132	2	0,142943812	0,682509308
at:49:1561:0:1	Cumberlandstraße	4	132	2	0,142943812	0,682509308
at:49:1005:0:1	Penzinger Straße	8	7684	3	0,142943812	0,682509308
at:49:520:0:2	Hietzing U	11	38193	2	0,142943812	0,682509308
at:49:1176:0:2	Schloss Schönbrunn	24	35083	3	0,142943812	0,682509308
at:49:520:0:1	Hietzing U	11	36581	3	0,142943812	0,682509308
at:49:1176:0:5	Schloss Schönbrunn	25	36631	2	0,142943812	0,682509308
at:49:1005:0:3	Penzinger Straße	17	36681	3	0,142943812	0,682509308
at:49:1404:0:3	Unter St. Veit U	2	6785	2	0,142943812	0,682509308
at:49:764:0:2	Lebinger gasse	1	60	2	0,057196309	0,66214208
at:49:54:0:2	Ameisbachzeile	1	76	2	0,057196309	0,66214208
at:49:156:0:2	Braillegasse	0	90	2	0,057196309	0,66214208
at:49:187:0:2	Burgersteingasse	3	102	2	0,057196309	0,66214208
at:49:187:0:1	Burgersteingasse	2	112	2	0,057196309	0,66214208
at:49:156:0:1	Braillegasse	0	102	2	0,057196309	0,66214208
at:49:1853:0:1	Hanusch-Krankenhaus	6	90	2	0,057196309	0,66214208
at:49:54:0:1	Ameisbachzeile	0	76	2	0,057196309	0,66214208
at:49:764:0:1	Lebinger gasse	1	60	2	0,057196309	0,66214208
at:49:1065:0:1	Raimannstraße	2	1267	2	0,057196309	0,66214208
at:49:1082:0:2	Reichmann gasse	2	6438	2	0,057196309	0,66214208
at:49:1188:0:2	Schreker gasse	2	6450	2	0,057196309	0,66214208

WEIGHTS

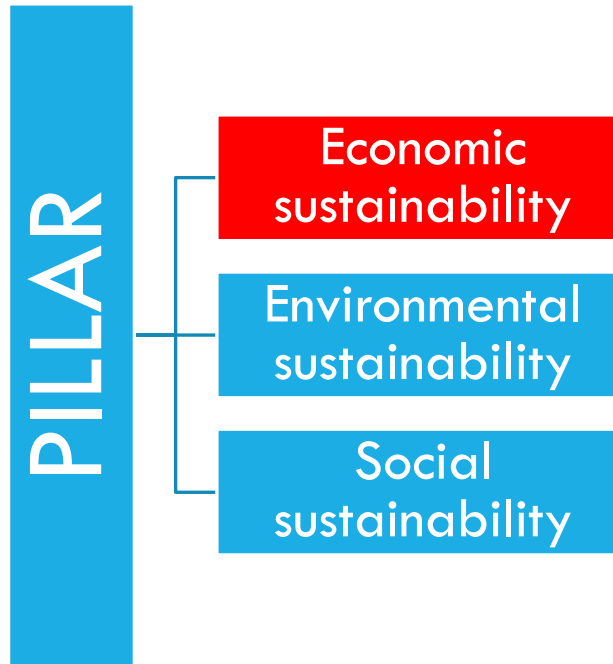

Source:

https://www.smartmobilityhubs.eu/_files/ugd/c54b12_8c0d1dd1b7ea4ef2b27db027a1f5ff74.pdf

Pillar			Weight
Demographics		Population Density	0.165
		Ratio Age 14-16	0.165
Environmental sustainability	Resilience	Betweenness	0.165
		Degree	0.165
Social sustainability	Amenities		0.33

PRELIMINARY RESULTS

stop_id	stop_name	rank
at:49:166:0:3	Wien Breitensee	6
at:49:166:0:7	Wien Breitensee	7
at:49:1176:0:3	Schloss Schönbrunn	5
at:49:1158:0:5	Linzer Straße/Johnstraße	8
at:49:1561:0:2	Cumberlandstraße	13
at:49:520:0:19	Hietzing U	11
at:49:1561:0:1	Cumberlandstraße	12
at:49:1005:0:1	Penzinger Straße	9
at:49:520:0:2	Hietzing U	10
at:49:1176:0:2	Schloss Schönbrunn	1
at:49:520:0:1	Hietzing U	4
at:49:1176:0:5	Schloss Schönbrunn	2
at:49:1005:0:3	Penzinger Straße	3
at:49:1404:0:3	Unter St. Veit U	15
at:49:764:0:2	Lebingerasse	22
at:49:54:0:2	Ameisbachzeile	21
at:49:156:0:2	Braillegasse	25
at:49:187:0:2	Burgersteingasse	16
at:49:187:0:1	Burgersteingasse	20
at:49:156:0:1	Braillegasse	24
at:49:1853:0:1	Hanusch-Krankenhaus	14
at:49:54:0:1	Ameisbachzeile	26
at:49:764:0:1	Lebingerasse	23
at:49:1065:0:1	Raimannstraße	19
at:49:1082:0:2	Reichmangasse	18
at:49:1188:0:2	Schrekergerasse	17

MCA method:

Technique for Order of Preference by Similarity to Ideal Solution (TOPSIS)

It is based on the concept that the chosen alternative should have the shortest geometric distance from the positive ideal solution (PIS) and the longest geometric distance from the negative ideal solution (NIS)

Normalization: min-max

Schloss Schönbrunn results to be the most desirable location

Real hubs actually perform rather well

NEXT STEPS

- Improving full demand per O/D **areas** → PTN demand per O/D **areas**
- Linking PTNB stations and computing travel time between any of them
- Adding bike network and repeating analysis on complete network
- Completing robustness and accessibility analysis after disruptions
- Testing parameters → sensitivity analysis
- Expanding criteria for MCDM
- Collecting better criteria weights through an *ad hoc* survey

LIMITATIONS

- We do not include capacity and congestion – working on it!
- We do not include the probability of a disruptive events
- Computational time is an issue



Thank you

Roberto Patuelli
roberto.patuelli@unibo.it

SmartHubs project:
<https://www.smartmobilityhubs.eu/>